


ADJUSTABLE INDUSTRIAL BRACKET FOR HEAVY OUTDOOR UNITS IN GALVANIZED STEEL AND
POWDER COATED IN POLYESTER RAL 9002

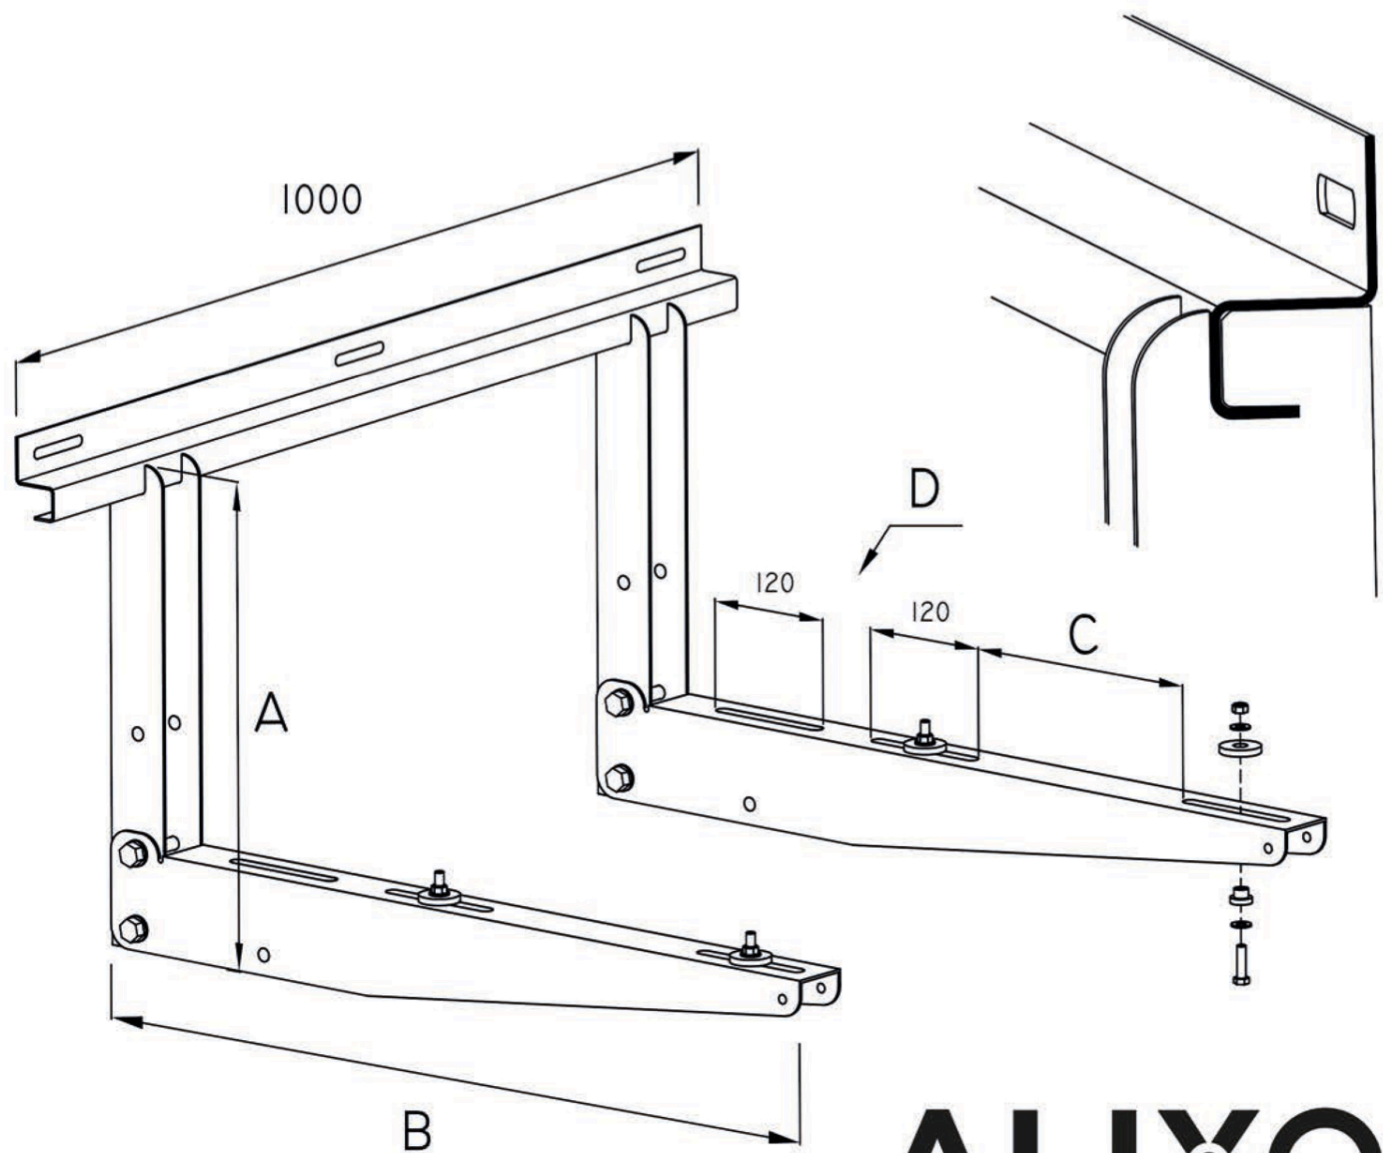

THE ADJUSTING ROD IS NOT BEARING. TO MAINTAIN THE DECLARED LOAD, THE BRACKET MUST BE FIXED IN THE PREDEFINED SLOTS OF THE MOUNT.

| TYPE | MAX. LOAD |
|----------|-----------|
| ALX-6030 | 240 DAN |

1 DAN ≈ 1 KgF

LOAD REFERRED TO A PAIR OF BRACKETS
CALCULATED ON 1/3 OF THE BREAKING LOAD
FOLLOWING STANDARDS CNR UNI 10011-73.

-DISTRIBUTED LOAD-

| TYPE | A | B | C | D |
|----------|-----|-----|-----|----------|
| ALX-6030 | 450 | 660 | 150 | 3EYELETS |

ALIXO

MEASUREMENTS IN MILLIMETERS.

TO ENSURE THE FASTENING OF THE BRACKET, USE ANCHORS SUITABLE FOR THE TYPE OF MASONRY . THE MANUFACTURER DISCLAIMS ANY RESPONSIBILITY FOR NON- CONFORMING FIXING.